


The economic soccer camera seat

ORBITER 270 *superflat*



simple • solid • economic

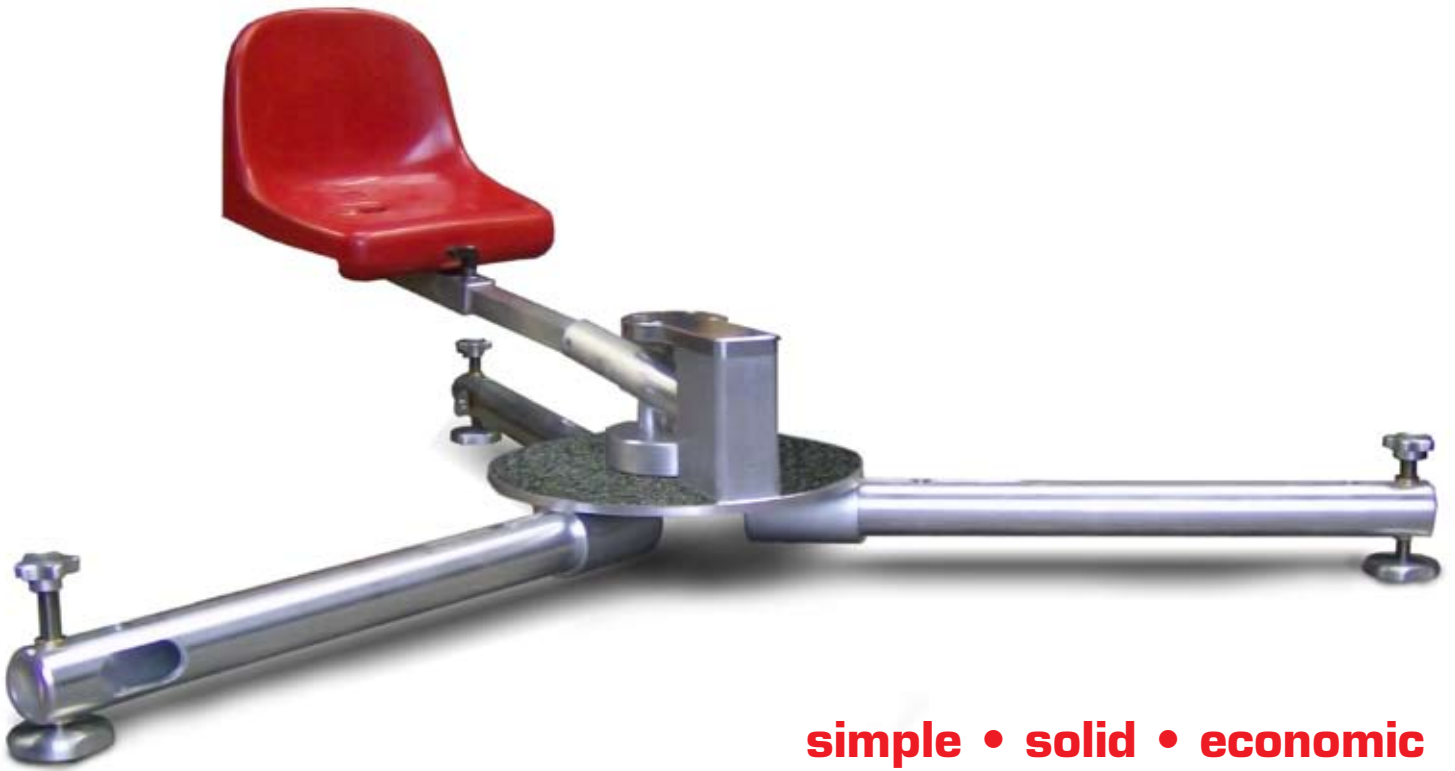

- 270° operation
- low working position
- close-ups free of shock motion
- small in size and lightweight
- easily assembled - no tools required
- easily levelled by tripod technique
- adjustable seat
- noncorrosive and outdoorproof
- easy to transport

ORBITER 270

superflat

The Orbiter 270 superflat is a low profile camera seat which was specifically designed for soccer broadcasts.

This low cost Orbiter provides a range of 270° for the operator in a low working position and independent movement of camera and seat as it is known from all its relatives out of the Orbiter family. Horizontal pan and the swivel seat are not linked but on the same axis.

There is also trouble-free movement due to its central cable feeding. Steady pictures are achieved by the Orbiter's specific design. Contrary to other low shooters the seat is not directly connected to the centre column, where the camera is mounted. This means no shock motions are transmitted from the operator to the camera.

At tennis broadcasts the Orbiter comes in handy if positioned close to the net and at athletics it is often used at the end of jump discipline areas.



The Orbiter 270 superflat is the economic version of the Orbiter 500 superflat and was designed to match the needs of all customers, looking for a cost efficient solution.




Take advantage of the comfortable and soft-running Orbiter to create excellent and dynamic pictures without interfering with views of spectators, referees and coaches.



Transport



Setup Sizes

Standard	Medium	Small
		
W: 180 cm D: 155 cm	W: 170 cm D: 130 cm	W: 115 cm D: 110 cm
Working range		
270°	270°	180°

Accessories / Options

Raising adaptor



Main features

- 270° working range
- Pan shot independent of the seat
- Central cable feeding
- Continuously adjustable seat
- Effortless operation
- Noiseless operation
- Assembled in less than two minutes
- Tripod easily levelled
- No tools
- Maintenance-free, noncorrosive
- Modular, upgradable design
- Standard fitting for all tripod heads

Technical specifications

Measures:
 Min. height of headplate 28 cm
 Width 115 - 180 cm
 Depth 110 - 155 cm

Weights and Loads:
 Standard. 60 kg
 Load capacity. 600 kg
 Bearing load dynamic 1500 kg

Options

- Trolley
- Platform
- Short legs for limited space
- Raising adaptor
- Wheels for quick position changes
- Suspended seat for further minimisation of shock motion
- Designed to customer specifications

Service

- 1 year warranty on all parts
- Free presentation on site
- Short and long term rentals

