



The camera seat system for stadium installation

ORBITER 500 stadium

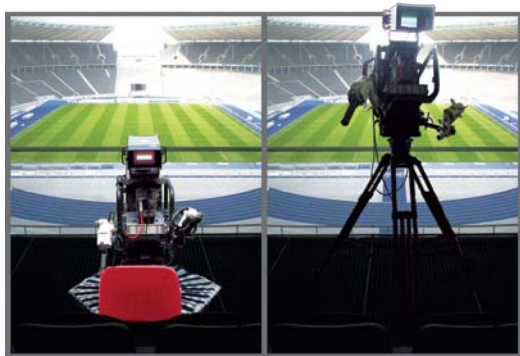

simple • solid • compact

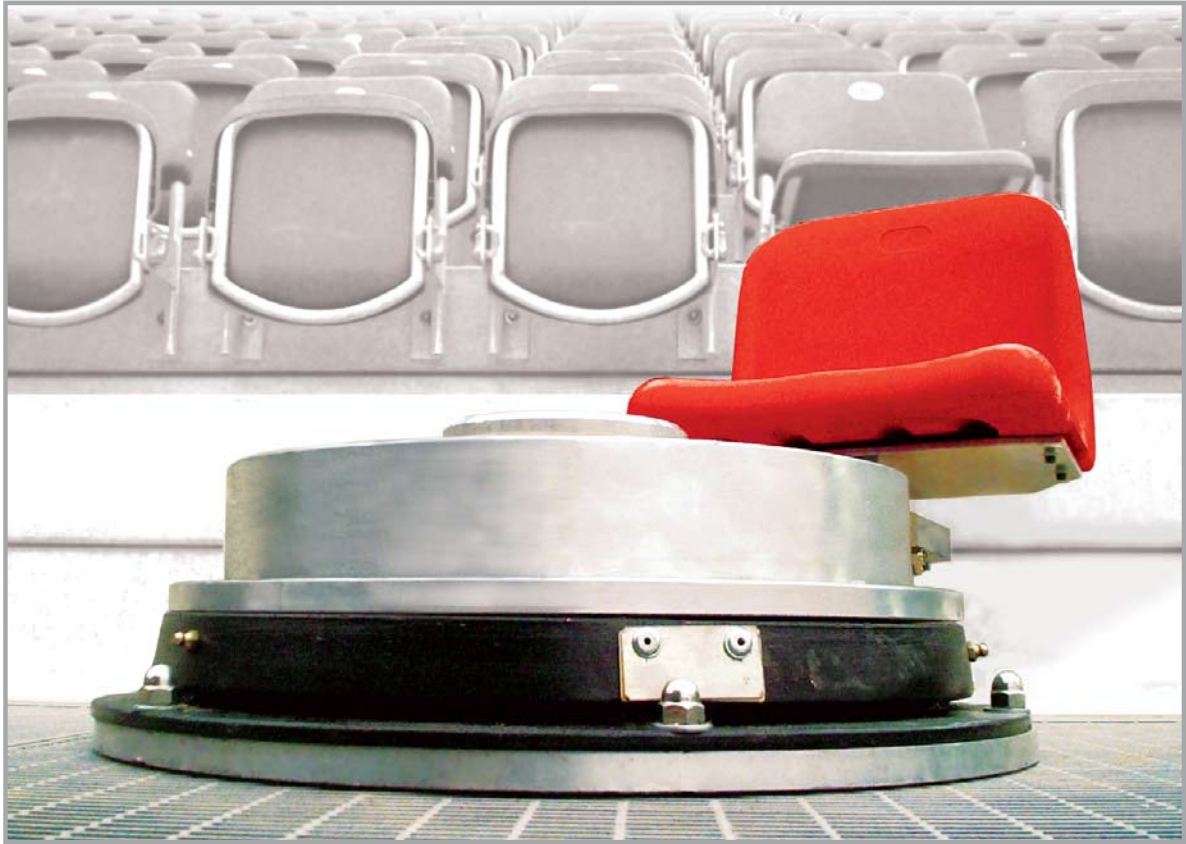

- 360° operation
- extremely low working position
- minimizes view restrictions
- close-ups free of shock motion
- adjustable seat
- noncorrosive and outdoorproof
- made to measure for restricted space
- designed for fix installations in venues

ORBITER 500 stadium

As cameramen often restrict the view of spectators, the new camera seat system Orbiter 500 stadium was designed to minimise such problems. Due to its extremely low working position, camera and operator can be perfectly integrated into the auditorium.

Up to 60 spectators can easily be accommodated in what was perviously the „dead angle“, enjoying an unimpeded view - a modest innovation that quickly reaps rewards. The Orbiter can easily be adapted to any specific space conditions in stadiums and other places of events.



When the Orbiter 500 stadium is used, the spatial position of the camera always remains constant in relation to its x/y/z axes during panning and tilting. The fixed installation of the system guarantees that the camera can repeatedly be positioned with the millimetre precision for each event.

The fixed position of the Orbiter avoids continual repetition of unnecessary and time consuming measurements, and eliminates sources of error. The Orbiter 500 stadium enables broadcasters to use the latest multimedia techniques for presenting the action on the field or stage, and ideally equips your venue for the future.

Central Cable Feeding



Raising Adaptor - Safety



Adjustable Seat Arm



Main Features

- Up to 360° working range
- Extremely low camera position
- Pan shot independent of the seat
- No shock motion transmitted to camera
- Effortless operation
- Central cable feeding
- Continuously adjustable seat
- Noiseless operation
- Adaptable to specific space conditions
- Maintenance-free, noncorrosive
- Standard fitting for all tripod heads
- Very robust

Technical Specifications

Measures:

Min. height of headplate 20 cm
 Width 160 cm
 Depth 160 cm

Loads:

Weight 30 kg
 Load capacity 600 kg
 Bearing load dynamic 3000 kg

Options

- Seat adjustable in hight
- Heavy duty version
- Designed to customer specifications
- Raising adaptor
- Installation on site

Service

- 1 year warranty
- Inspection of site and consulting